

Collection:Lyle


Installation manual for:

LD6252BK D8"H10" L1

Installation instructions:

- 1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3. "E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4. Secure mounting bracket to the junction box.
- 5.Insert screws (P4) in side of top unit the mounting bracket.
- 6.Put the canopy (P5) on the mounting bracket(P1) and use the Cap nut(P6) to screw tighten.
- 7.Install E26 light source, no include bulb.
- 8.Place the glass shade (P15) on the straight side disc (P13) and tighten it with a cap screw (P14).

The end!

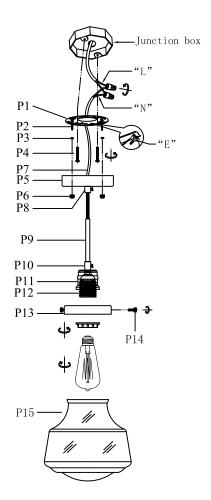

PARTS LIST

part	picture	Description	Qty	Check	list
P1	0	D4″ Mounting bracket	1		
P2		5/32-32 Screw	2		
Р3	()	Hex nut	2		
P4	-	5/32-32 Screw	2		
P5		D4.75" Canopy plat	1		
P6		Cap nut	2		
P7		Two-core Power Cord 5.6' Black	1		
P8		Car iron parts	1		
P9		L4. 15"Tube	1		
P10		Coupling	1		
P11		D2" Socket cover	1		
P12		E26 Socket	1		
P13		D4.33" Straight edge disk	1		
P14	7	Cap screw	3		
P15		D8"*H7.5" Glass shade	1		

"L" = Hot wire

"N" = Neutral wire

"E" = Ground wire