

LIVING DISTRICT


Collection: Westley

Installation manual for:

LD7047D28BK/BR D28" H23.1" L9

Installation instructions:

1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
 3. "E" wire from the fixture is attached to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
 4. Secure mounting bracket to the junction box.
 5. Twist tube(P8) to wire box(P10), connect chain(P6) to Toothed ring (P7), connect chain(P6) to canopy(P4)
 6. Separate and adjust the lamp arms, Use the screw(P3) to lock the lamp body to the mounting bracket(P1) on the ceiling.
 7. Put the socket tube(P12) on the socket (P13), and install E12 light source.(Bulbs not supplied)
- The end!

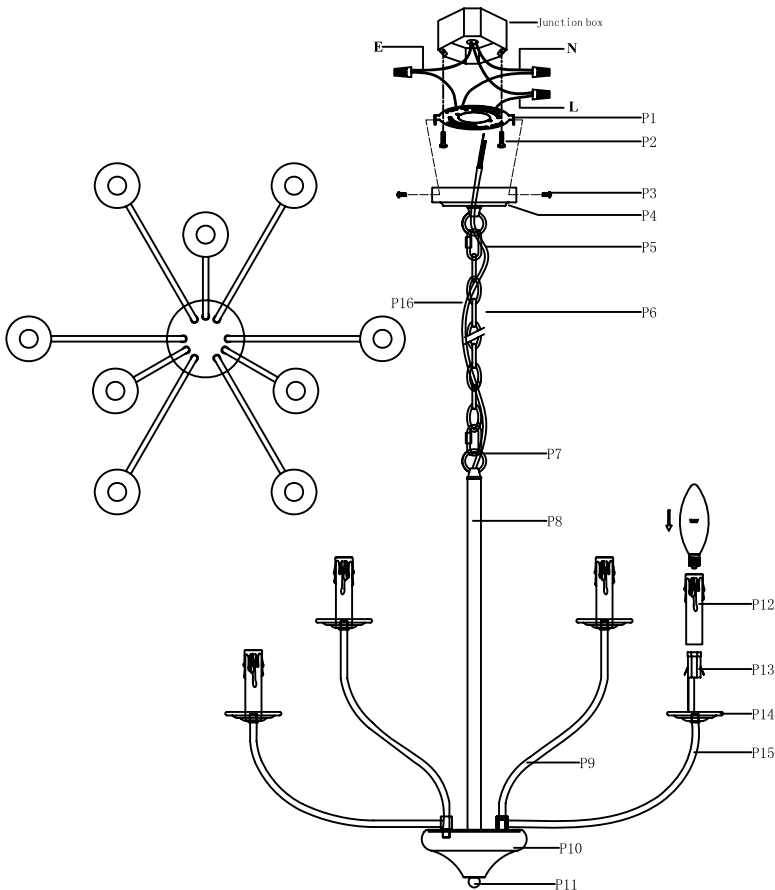

Part	Picture	Description	Qty	Check list
P1		mounting bracket Φ4.53"×H0.59"	1	
P2		Mounting bracket screw	2	
P3		Screw	2	
P4		Canopy (Φ4.72"×H1.02")	1	
P5		Activity buckle L1.5"×W0.78"×Φ0.15"	2	
P6		Hanging chain(CHAIN04P) L1.5"×W0.78"×Φ0.15"(Total length 59")	1	
P7		Toothed ring W1.3"×H1.6", M10	2	
P8		Tube Φ0.75"×L19.69"	1	
P9		Lamp arm L12.2"×H6.3"	3	
P10		wire box cover Φ5.91"×H2.68"	1	
P11		nut Φ0.79"×H0.67", M10	1	
P12		socket tube Φ0.98"×H3.94"	6	
P13		E12 holder	6	
P14		dish Φ3.15"×H0.47"	6	
P15		Lamp arm L11.4"×H6.5"	6	
P16		UL18#SVT-3, L78.7"	1	

"L" = Hot wire

"N" = Neutral wire

"E" = Ground wire