

CF3200

12" LED TWO RING DECORATIVE CEILING LIGHT

Elitco Lighting



LED Ceiling Light

CF3200

Performance


- metal base with white powder coated;nickel stain ring, white acrylic diffuse lens
- ETL listed, for use in Damp locations
- 120V dimmable

Construction

- metal base with white powder coat finish,nickel stain ring
- White acrylic diffuse lens
- 1xQT1760/480/R LED module
- One LED DRIVER

Installation

- The LED ceiling light is surface mounted by standard mounting screw (mounting screws not provided)






Photometrics

CF3200

Luminous flux	1300LM
Maximum intensity	cd
Input wattage	17W
Lumens per watt	70 LPW
Beam angle	0°

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

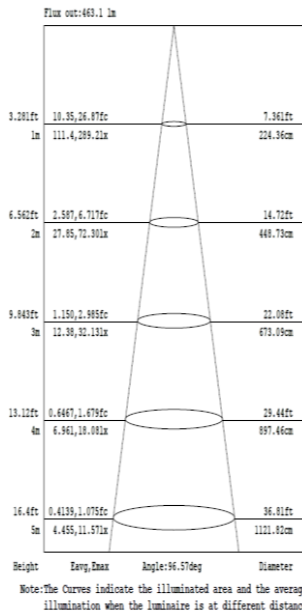

Specifications

Model #	CF3200
Input Voltage	120V AC, 60Hz
Color Temperature	3000K
CRI	90+
Current	110mA
Watts	17W
Lumens	1300LM
Dimmable	YES
Housing Material	metal
Lens	White acrylic diffuse
Rating	ETL&cETL Listed, Damp locations
Dimensions	Dia 12"x H 3"
Power Factor	>95%
Mounting	Surface mount
LED Type	LM80 LEDs
Average Life (Hrs)	50,000 hrs.
Warranty	5-year limited