



**7890G38**

**D38"H53"L12+6+3**

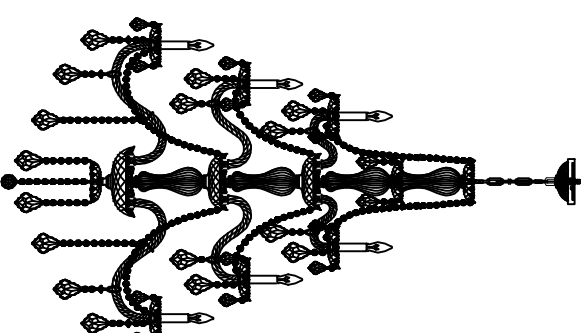

**We are dedicated to providing the finest quality crystal chandelier for our customers. Our master craftsmen and designer pride themselves on their attention to detail. prompt, efficient service is our priority. Enclosed, are detailed instructions on how to properly install your chandelier. Please read all instructions carefully and thoroughly. If you have any questions please feel free to call our toll free CHANDELLIER HOTLINE AT:**



**1-888-388-3390**



# WARNING!!!

## CONTENTS ARE FRAGILE HANDLE WITH CARE

The metal frame and crystal components of this chandelier are very delicate. Please exercise extreme caution during unpacking and installation.

# WARNING!!!


After passing the main electrical wire through the 10mm pipe and connecting the pipe to the main body top connector, please all remaining pieces as shown in numerical order and in the orientation depicted. Refer to the parts list to avoid confusion between parts. The part numbers coincide.

## CAUTION

1. Rated 110-130V/60Hz, bulb 40W maximum
2. Care should be taken to avoid damage to the surface of lighting and wire, wearing gloves is recommended when installing.
3. Connect black or red wire of the lighting to live wire and white or blue wire to neutral wire and double colored(or bare copper) wire to ground wire.
4. Never install lighting on damp ceiling the room should be dry and well ventilated.
5. Keep lighting away from acid, alkali and other corrosive chemical or gas, clean the lighting with clean soft cloth only.
6. Installation must be carried out by qualified electrician only.
7. Disconnect the power before installing cleaning and replacing lighting.
8. Never cover the lighting when power is connected.
9. Firmness must be secured when installing ceiling tube, chain, pipe and other connecting parts.
10. Care should be taken to avoid damage when installing glass parts.
11. All electrical components must be installed by a licensed electrician and in accordance with the National Electrical Code and the appropriate local electrical codes. Make sure that the electrical supply to the chandelier is turned off at the main fuse or circuit breaker before doing any installation.

## Crystal Dressing Instructions


When dressing the chandelier with the crystals please remember to wear either rubber or cotton gloves. So as to prevent any damage or smudging on the crystals.

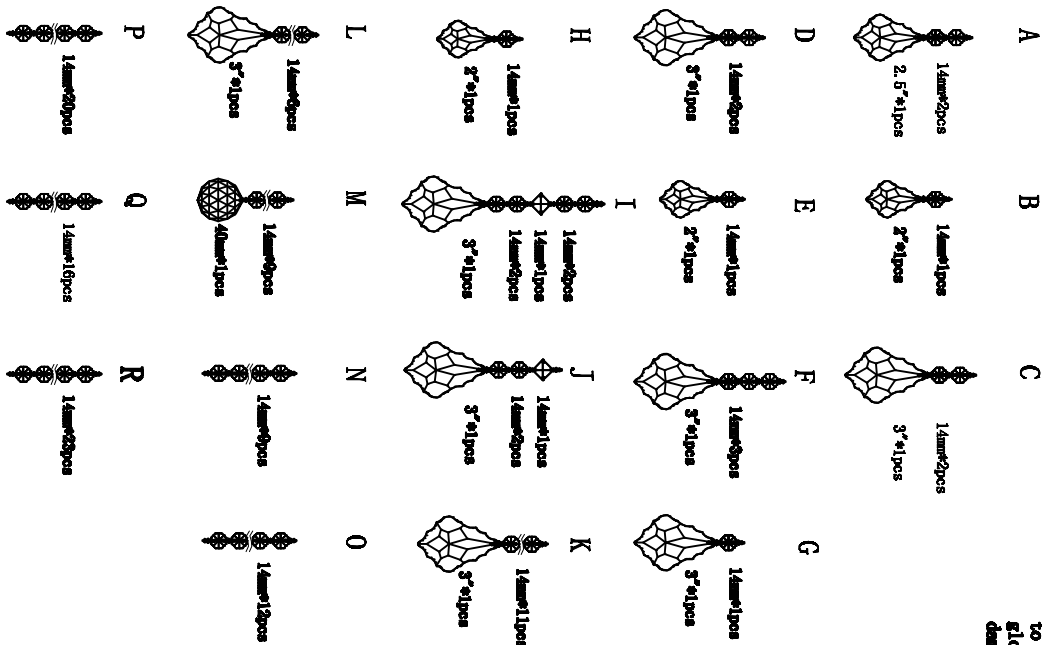

No	Quantity
A	4 strings
B	12 strings
C	3 strings
D	3 strings
E	24 strings
F	6 strings
G	6 strings
H	48 strings
I	12 strings
J	12 strings
K	12 strings
L	4 strings
M	1 strings
N	12 strings
O	12 strings
P	12 strings
Q	6 strings
R	3 strings

# Crystal Dressing Diagram

When dressing the chandelier with the crystals please remember to wear either rubber or cotton gloves. So as to prevent any damage or smudging on the crystals.

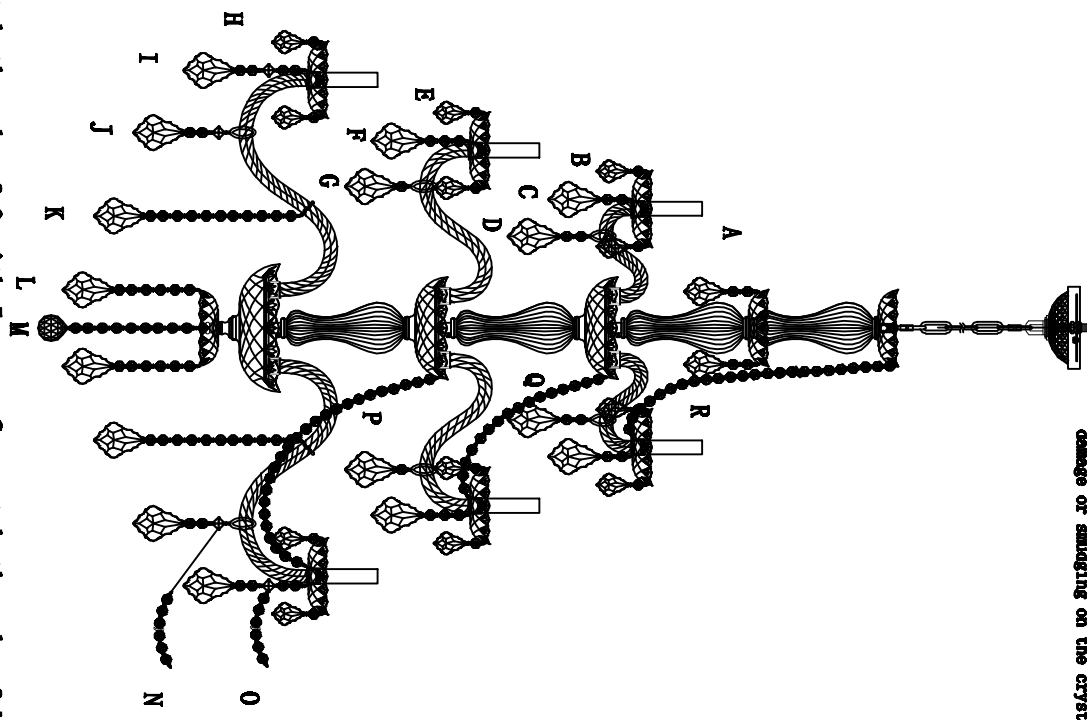


Connect both ends of O with I

09


Connect both ends of N with J

## CANOPY PARTS LIST


ZA: Existing Electrical Box (not supplied)



ZB: Crossbar




ZC: Crossbar Screws x 2 (not supplied)




ZD: Canopy Lock



ZE: Canopy



ZF: Metal Ring



ZG: Chain



ZH: Ground Wire




ZI: Canopy Loop




ZJ: Electric Main



ZK: Junction Caps



02

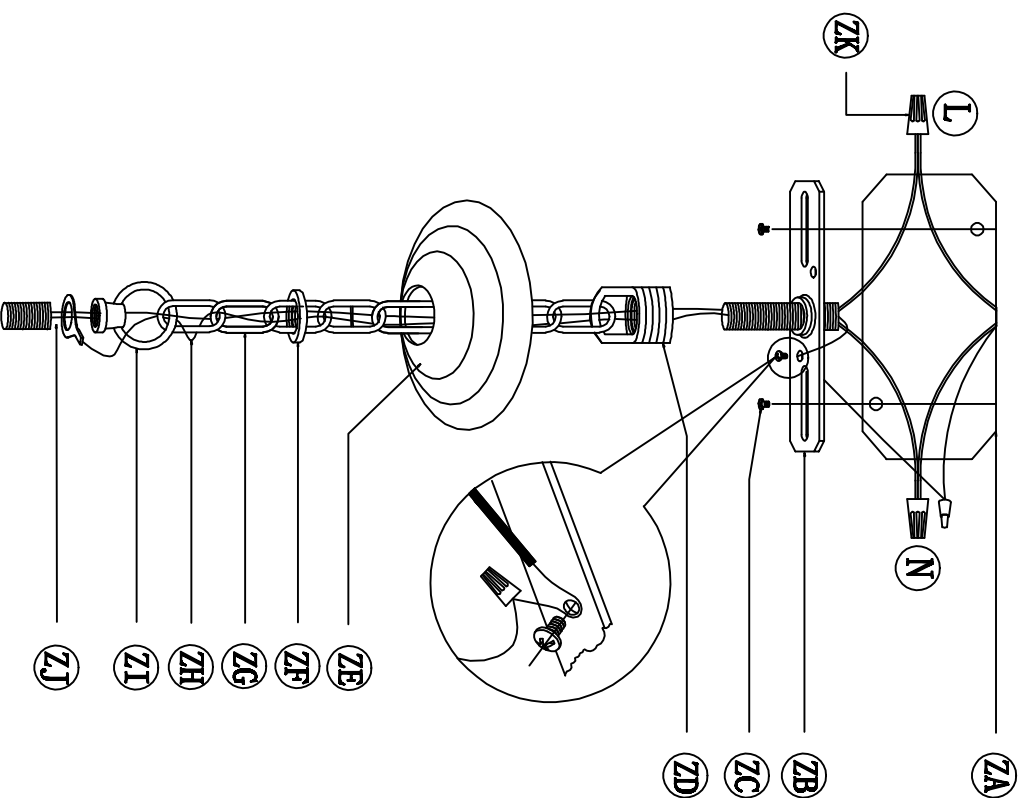**CANOPY INSTALLATION DIAGRAM**

03

**Frame Assembly Instruction**

















Please read all instructions carefully. Before you proceed to install, make sure that the power supply is tamed off and off until installation is complete. Please note that each part has been assigned a letter. Please proceed in alphabetical order.

1. Install (Cast Canopy)01 to the electric Box and wire properly.
2. Fixed (Chain Connector)02 with (All Thread)09 and Fasten (Ground Screw)35.
3. Wear (Crystal Ring)20 on (Glass Arm)21.
4. Fixed (Glass Arm)21 with (Round Metal Slice)12 by (Spring Seat)19, (Set Screw)17
5. Connected cable of (Glass Arm)21 with main cable.
6. Fixed (Bottom Cover)15, (Crystal Bowl)14 , (Straight edge cover)06, (Glass Column)07, (Straight edge cover)08, (Direct Connection)10 and (Round Metal Slice)36, on from (Metal tube)16
7. Wear (Crystal Ring)20 on (Glass Arm)26.
8. Fixed (Glass Arm)26 with (Round Metal Slice)36 by (Spring Seat)19, (Set Screw)17
9. Fixed (Bottom Cover)15, (Crystal Bowl)14 , (Straight edge cover)06, (Glass Column)07, (Straight edge cover)08, (Direct Connection)10 and (Round Metal Slice)33, on from (Metal tube)16
10. Wear (Crystal Ring)20 on (Glass Arm)34.
11. Fixed (Glass Arm)34 with (Round Metal Slice)33 by (Spring Seat)19, (Set Screw)17
12. Take out the (Sleeve Cover)25, and put (Crystal Bowl)05 and then put back (Sleeve Cover)25
13. Take (Cast Bottom Fina)27, (Bottom Cover)31, (Crystal Bowl)30 , (Iron piece) 29, (Crystal Bowl)05 and (Ring)28 off from (All Thread)32. by (Cast Bottom Fina)27
14. Fixed (Cast Bottom Fina)27, (Bottom Cover)31, (Crystal Bowl)30 , (Iron piece) 29, (Crystal Bowl)05 and (Ring)28 on from (All Thread)32
15. Dressing Crystal using Diagram provided.

The end!

08

## Fram Parts List

		
21-Glass Arm	28-Ring	34-Glass Arm
		
22-Sleeve cover	29-Iron piece	35-Ground Screw
		
23-A11 thread	30-Crystal Bowl	36-Round Metal Slice
		
24-Socket	31-Bottom Cover	
		
25-Sleeve cover	32-A11 thread	
		
26-Glass Arm	33-Round Metal Slice	
		
27-Cast Bottom Finial		

07


## CANOPY INSTALLATION INSTRUCTIONS

Please read all instructions carefully. Before you proceed to install, make sure that the power supply is tamed off and off until installation is complete. Please note that each part has been assigned a letter. Please proceed in alphabetical order.

- ZA. Junction Box (not supplied)
  - ZB. Crossbar
  - ZC. Crossbar Screws
  - ZD. Canopy Loop
  - ZE. Canopy
  - ZF. Metal Ring
  - ZG. Chain
  - ZH. Ground Wire
  - ZI. Canopy Loop
  - ZJ. Electric Loop
  - ZK. Junction Caps
1. Attach the Crossbar (ZB) to the Junction Box (ZA) using the two crossbar screws (ZC) which are not supplied and should already be in your box.
  2. Slide the Metal Ring (ZF) back up over the canopy (ZE), pass the canopy loop (ZD) through canopy (ZE), connect with the threaded pipe underside of the crossbar.
  3. Pass the electric loop (ZJ) and ground wire (ZH) through the chain (ZG), the Metal Ring (ZF), the canopy (ZE), the canopy loop (ZD) and the crossbar (ZB) until the end of the electric loop (ZJ) reaches the junction box (ZA) where you can make the appropriate connections.
  4. Be sure when connecting the wire use electrician approved junction caps (ZK).
  5. Stow the excess wire in the junction box (ZA).
  6. Raise the canopy (ZE).
  7. Metal Ring (ZF), attach canopy (ZE) to ceiling, slide Metal Ring (ZF) over canopy loop (ZD) and hold the canopy (ZE).







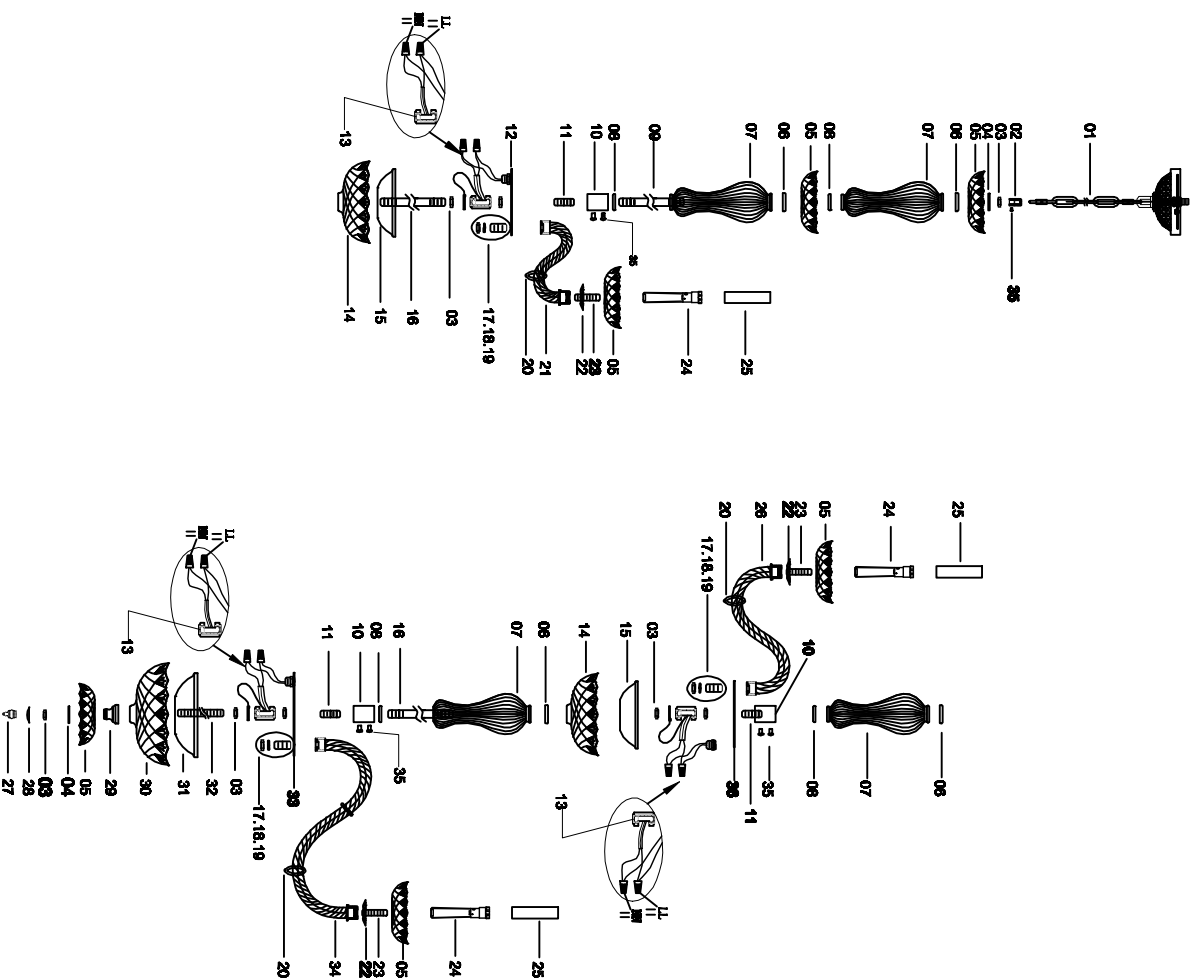











04

# Frame Assembly Diagram



05

# Fram Parts List

- |   |   |   |
|---|---|---|
|  |  |  |
| <b>01-Cast Canopy</b>   | <b>08-Straight edge cover</b>   | <b>15-Bottom Cover</b>  |
|    |    |    |
| <b>02-chain Connector</b>   | <b>09-Metal tube</b>  | <b>16-Metal tube</b>  |
|    |    |    |
| <b>03-Set Screw</b>   | <b>10-Direct Connection</b>   | <b>17-Set Screw</b>   |
|    |    |    |
| <b>04-Plastic Spacers</b>   | <b>11-All thread</b>  | <b>18-All thread</b>  |
|    |    |    |
| <b>05-Crystal Bowl</b>  | <b>12-Round Metal Slice</b>   | <b>19-Spring Seat</b>   |
|    |    |    |
| <b>06-Straight edge cover</b>   | <b>13-Nut</b>   | <b>20-Glass Ring</b>  |

06