

Collection: Frey

Installation manual for:

LD5030D42BK L42. 8"*W10. 5"*H15. 6"L3

Installation instructions:


- 1.Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3."E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4. Secure mounting bracket to the junction box.
- 5.Insert screws(P2) in side of top unit the mounting bracket.
- 6.Install the top plate (05) on the hanging plate (01) with the (04) screw
- 7. Install the glass cover (11) onto the terminal block (08) and lock it with the screw (09)
- 8.Install the bulbs(not included) into the lamp fixture.

PARTS LIST

picture

Description | Qty Check list

The end!

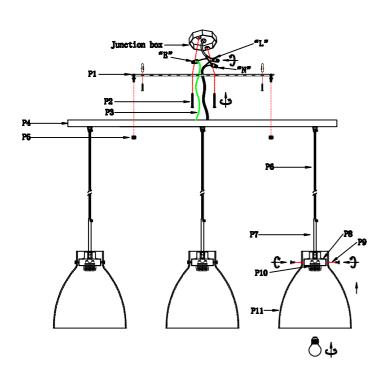

| P1 | | L20.6" Mounting bracket | 1 | |
|-----|----------|---------------------------------------------|---|--|
| P2 | - | 5/32-32 Screw | 2 | |
| Р3 | <i>\</i> | ground wire | 1 | |
| P4 | | L38.6"*\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\ | 1 | |
| P5 | | Nut | 2 | |
| P6 | ~ | Power Cord 79" SPV Black | 3 | |
| P7 | | <pre>@0.4"*L5.1" metal tube</pre> | 3 | |
| P8 | | D3. 1"*H2" Terminal Block | 3 | |
| P9 | 1 | Screw | 9 | |
| P10 | | E26 socket | 3 | |
| P11 | | ø10. 5″*H11″Glass | 3 | |
| P12 | | | | |
| P13 | | | | |
| P14 | | | | |
| P15 | | | | |
| P16 | | | | |
| P17 | | | | |
| P18 | | | | |
| P19 | | | | |

"L" = Hot wire
"N" = Neutral wire
"E" = Ground wire