### **Features**

- Includes faceplate with handle.
- A single handle controls both on/off activation and temperature setting.
- Cross handle.
- Complements Purist faucets and accessories.

### Material

- Premium material construction with metal handle ensures reliability and durability.
- KOHLER finishes resist corrosion and tarnishing.

#### Installation

 Trim only; requires valve to complete installation (sold separately).

# **Required Products/Accessories**

K-304 Series Rite-Temp® Valves

or

K-8304 Series Rite-Temp® Valve & Cartridge Kits

or

K-8300 Series Rite-Temp® Valve Body Rough-ins K-8305 Series Rite-Temp® Cartridges

or

K-2971-KS 3/4" Pressure-balancing Valve

# **Recommended Products/Accessories**

K-23723 Faucet cleaner

# **Optional Products/Accessories**

K-10350 Deep rough-in kit

K-10351 Test cap for K-8300 Series valve bodies



ADA

### Codes/Standards

ASME A112.18.1/CSA B125.1 ADA ICC/ANSI A117.1

# KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.


### **Available Colors/Finishes**

Color tiles intended for reference only.

| Color | Code | Description                    |
|-------|------|--------------------------------|
|       | CP   | Polished Chrome                |
|       | SN   | Vibrant® Polished Nickel       |
|       | BN   | Vibrant® Brushed Nickel        |
|       | BV   | Vibrant® Brushed Bronze        |
|       | BL   | Matte Black                    |
|       | 2MB  | Vibrant® Brushed Moderne Brass |



# Rite-Temp® valve trim with cross handle K-TS14423-3

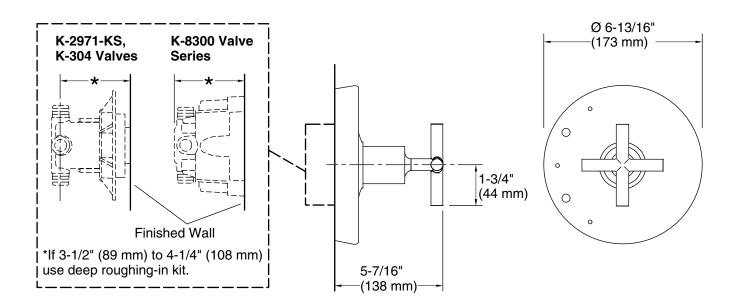

### **Technical Information**

All product dimensions are nominal.

### **Showerhead/Body Spray:**

2.5 gal/min (9.5 l/min) Rated maximum flow:

## **Notes**

Install the product according to the installation guide.

NOTICE: Risk of product damage. Long screws for installing trim can damage the K-2971-KS valve. Consult the trim installation guide to verify if the thin wall installation kit (88526) is needed.

ADA compliant when installed to the specific requirements of these regulations.

