

# Bancroft® Rite-Temp® Valve Trim K-TS10584-4

#### **Features**

- Includes face plate with handle.
- Single handle controls both on/off activation and temperature setting.
- Supplied with ADA compliant metal lever handle.
- Complements the Bancroft faucet and accessory collections.

#### Material

- Premium material construction with metal handle ensures reliability and durability.
- KOHLER finishes resist corrosion and tarnishing, exceeding industry durability standards.

#### Installation

Trim set requires valve to complete installation.

## **Required Products/Accessories**

K-304/K-P304 Series Rite-Temp® Valves

or

K-304/K-P304 Series Rite-Temp® Valves

UI.

K-304/K-P304 Series Rite-Temp® Valves

or

K-304/K-P304 Series Rite-Temp® Valves

or
K-304/K-P304 Series Rite-Temp® Valves

or

٠.

K-304/K-P304 Series Rite-Temp® Valves

K-304/K-P304 Series Rite-Temp® Valves

r

K-304/K-P304 Series Rite-Temp® Valves

r

K-304/K-P304 Series Rite-Temp® Valves

or K-304/K-P304 Series Rite-Temp® Valves

OI

K-304/K-P304 Series Rite-Temp® Valves

or

K-8304/K-P8304 Series Rite-Temp® Valve & Cartridge Kits



ADA	CSA B651	ОВС
-----	----------	-----

Codes/Standards
ASME A112.18.1/CSA B125.1
ADA
ICC/ANSI A117.1
CSA B651
OBC

# KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

#### Available Colors/Finishes

Color tiles intended for reference only.


Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	BN	Vibrant® Brushed Nickel
	BV	Vibrant® Brushed Bronze
	2BZ	Oil-Rubbed Bronze





# Bancroft® Temp® Valve Trim

Rite-Temp® Valve Trim K-TS10584-4

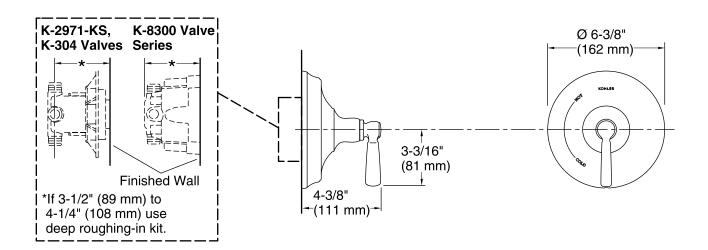

#### **Technical Information**

All product dimensions are nominal.

## **Showerhead/Body Spray:**

Rated maximum flow: 2.5 gal/min (9.5 l/min) Pressure: 80 psi (5.5 bar)

#### **Notes**

Install the product according to the installation guide.

NOTICE: Risk of product damage. Long screws for installing trim can damage the K-2971-KS valve. Consult the trim installation guide to verify if the thin wall installation kit (88526) is needed. ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

